


DSQ41J

Active SAT devices

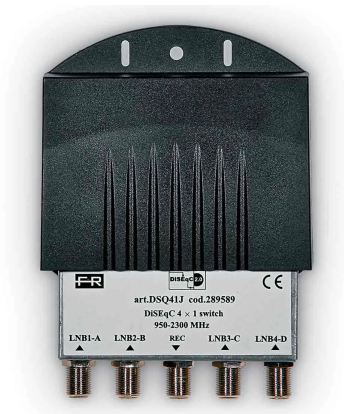

4 inputs line switch controlled by SAT receivers with DiSEqC commands on output port through coaxial cable

Technical Chars

- Enables the switching of 2 or 4 converters by means of digital commands generated by your satellite receiver via the coaxial cable (example: Hotbird 13°E and Astra19.2°E)
- Plastic protection for outdoor installation included in the package.

DSQ41J		
Code		289589
Inputs		4
Bandwidth	MHz	950 - 2300
Insertion loss	dB	4
DiSEqC		2.0
Isolation	dB	35
Dimensions and packaging		
Pieces		1
EAN code		8016978071401
Multiple EAN		8016978071432
Packaging dimensions	mm	100 x 35 x 105
Packaging weight	kg	0.14